

# Lead Free\* Lavatory Connector - 3/8" Comp. x 1/2" FIP



## Product Specifications

### FEATURES

- Temperature: 200° Fahrenheit Maximum Working Temperature
- Pressure: 125 PSI Maximum Burst Pressure
- Material: Stainless Steel Braid, Brass Nuts, Brass Barbs, Rubber Washers, Stainless Steel Ferrules




### APPLICABLE STANDARDS/CODES

Specified model meets or exceeds the following:

- ASME A112.18.6/ CSA B125.6
- IAPMO/cUPC
- NSF/ANSI 372
- NSF/ANSI 61 – Sec. 9
- \*≤ .25% Pb

✓ To Submit	Part #	Description	Connector Length (in)
	MLB112AF	Lead Free* Lavatory Connector - 3/8 Comp. x 1/2 FIP	12"
	MLB116AF	Lead Free* Lavatory Connector - 3/8 Comp. x 1/2 FIP	16"
	MLB120AF	Lead Free* Lavatory Connector - 3/8 Comp. x 1/2 FIP	20"
	MLB130AF	Lead Free* Lavatory Connector - 3/8 Comp. x 1/2 FIP	30"

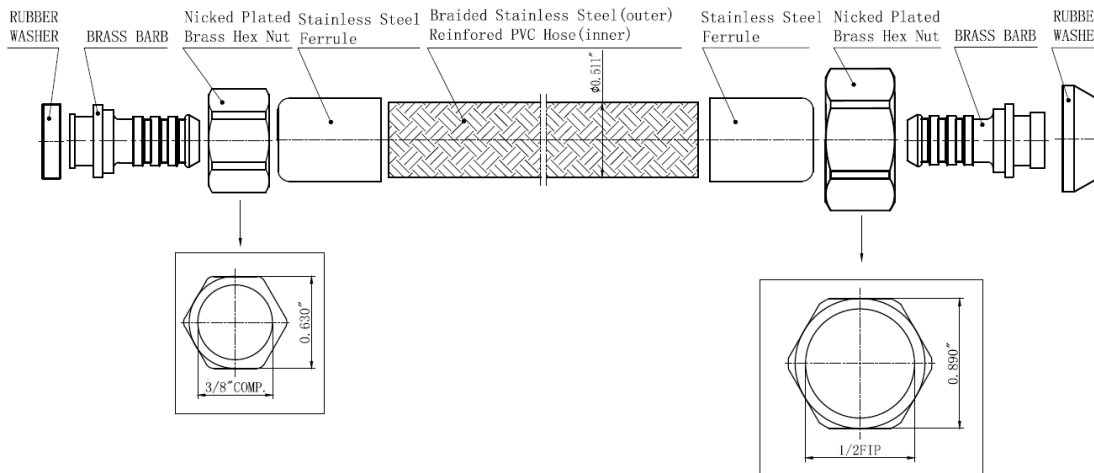

### Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

NSF/ANSI 372  
NSF/ANSI 61-9



Contact your sales representative for more information or visit our website at [mainlinecollection.ca](http://mainlinecollection.ca)