

# Stainless Steel Braided Flexible Supply Line

## Conduit d'alimentation tressé en acier inoxydable flexible

Product Specifications




### MLB112KCF

### FEATURES

- 3/8" Comp x 3/8" OD Brass Nut x 12" L (Delta Style)
- Stainless Steel Braiding
- Nickel Plated Brass Nuts
- Brass Barbs
- Rubber Washers
- Steel Ferrule
- Flow Rate: 2500PSI Max. Burst Pressure
- 180 Max Working Temperature

### CARACTÉRISTIQUES

- 3/8 po comp. x 3/8 po écrou de laiton x 12 po longueur (Styles Delta)
- Tressé en acier inoxydable
- Écrous en laiton plaqué nickel
- Barbelure en laiton
- Rondelle de caoutchouc
- Manchon en acier
- Débit maximal : max. 2500 po2 pression d'éclatement

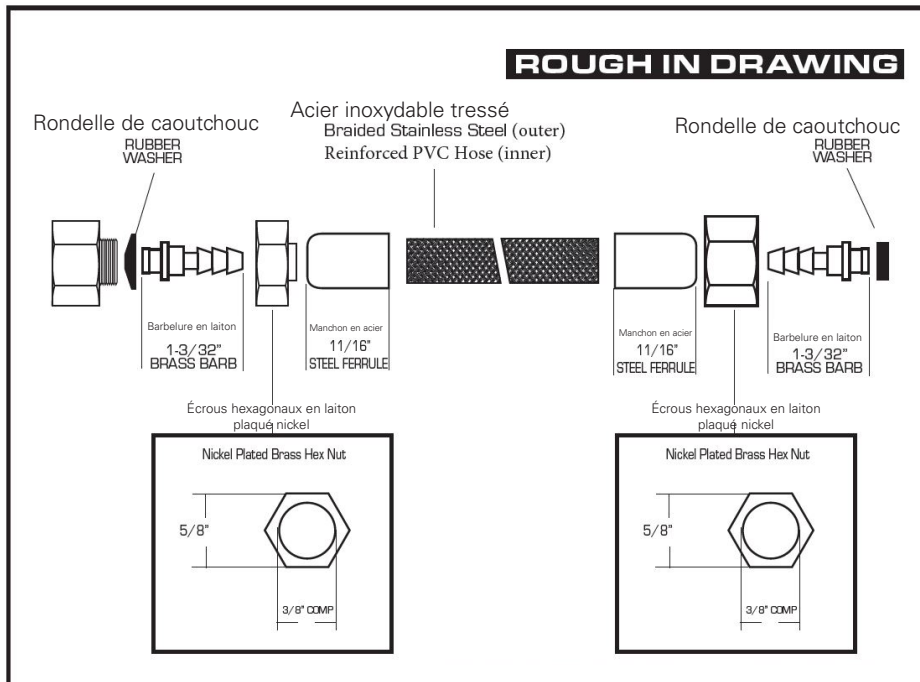

Contact your sales representative for more information or visit our website at [mainlinecollection.ca](http://mainlinecollection.ca)